

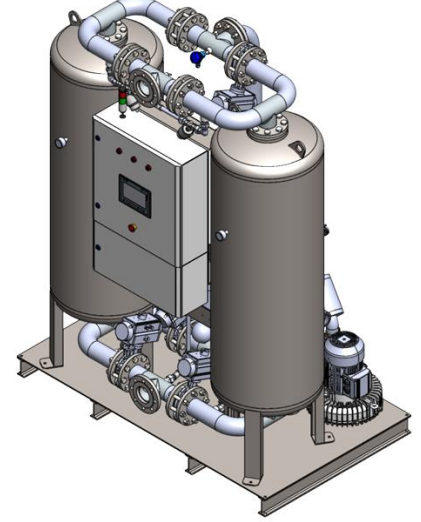


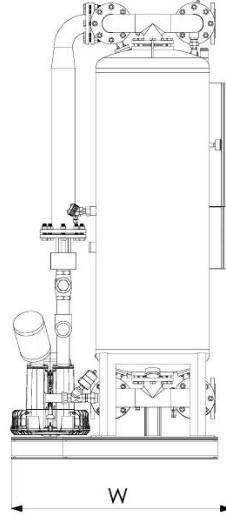

Nitroxtec Heated Type Desiccant Dryer

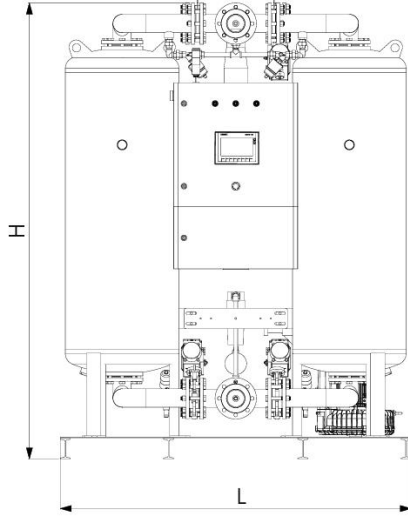

NDDB-83

m ³ / minute	83,33
m ³ / hour	5000
Operating pressure [bar] (g)	13
Inlet - Outlet	DN125 FLANGE - DN125 FLANGE
Purge air loss	0 – 3% (adjustable)
Dimensions L x W x H [mm]	2200 x 1500 x 2550
Shipping dimensions L x W x H [mm]	2250 x 1550 x 2690
Maintenance area L x W x H [mm]	2700 x 2000 x 3050
Raw Material	High-Efficiency Silica Gel
Raw Material Weight [kg]	1452
Net Weight [kg]	3200
Gross Weight [kg]	3250
Power	380-400V AC 50/60 Hz 37,7 KW
FLANGE Filters [µm]	Pre-filter 0,1 - Post-filter 0,01
Operating temperature	5-45°C
Minimum inlet pressure	4,5 bar (g)
Dew point	-40°C
Air quality ISO Specification	ISO 8573.1:2010.1.4.1

Pressure Correction Factor									
Pressure (bar g)	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00	13,00
Factor	0,75	0,88	1,00	1,12	1,25	1,37	1,48	1,58	1,66

Temperature Correction Factor						
Temp (°C)	20,00	25,00	30,00	35,00	40,00	45,00
Factor	1,00	1,00	1,00	1,00	0.8	0.73

NİTROXTEC ENDÜSTRİYEL MAKİNA

Address: İkitelli O.S.B. Dersan Blok Sokak Trios 2023 B Blok No:73 Başakşehir - İstanbul Türkiye

Phone: +90 212 544 42 61 **Email:** info@nitroxtec.com