

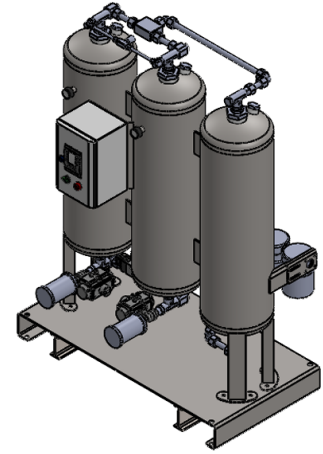


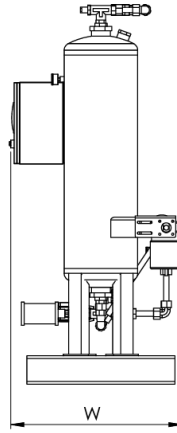

NITROXTEC High-Pressure Oil-Less Desiccant Dryer

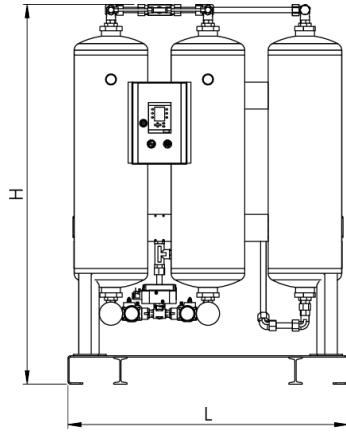

NDD+CT-3.2/50BAR

m ³ / minute	3,20
m ³ / hour	300
Operating pressure [bar] (g)	40
Inlet - Outlet	DN15/BSP 1/2" Female - DN15/BSP 1/2" Female
Purge air loss	5%
Dimensions L x W x H [mm]	745 x 460 x 1240
Shipping dimensions L x W x H [mm]	795 x 510 x 1380
Maintenance area L x W x H [mm]	1245 x 960 x 1740
Raw Material	Activated Carbon & Activated Alumina
Raw Material Weight [kg]	A. C. 8,1 - A. A. 16
Net Weight [kg]	96
Gross Weight [kg]	105
Power	110-240V AC 50/60 Hz 50 W
Pre-filter - Post-filter [µm]	0,1 - 0,01
Operating temperature	5-45°C
Minimum inlet pressure	4,5 bar (g)
Maximum inlet pressure	50 bar (g)
Dew point	-40°C
Residual oil vapour content nominal (mg/m ³)	< 0.003
Air quality ISO Specification	ISO 8573-1:2010 [Class 1 : Class 2 : Class 1] (Particles : Humidity : Oil)

Compressed Air Inlet Temperature (Ti)						
Temp (°C)	25,00	30,00	35,00	40,00	45,00	50,00
Ki	1,00	1,00	1,00	0,96	0,90	0,83

Deviating working pressure P at the dryer inlet						
P bar(g)	20,00	25,00	30,00	35,00	40,00	50,00
Kp	0,50	0,63	0,75	0,88	1,00	1,25