

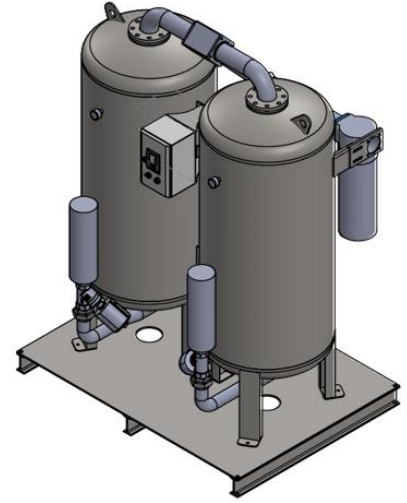


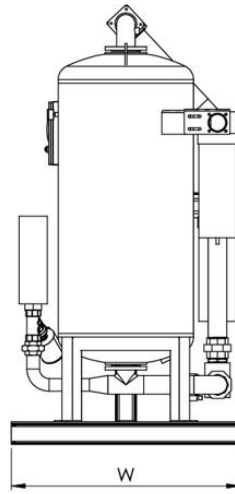

Nitroxtec Desiccant Dryer

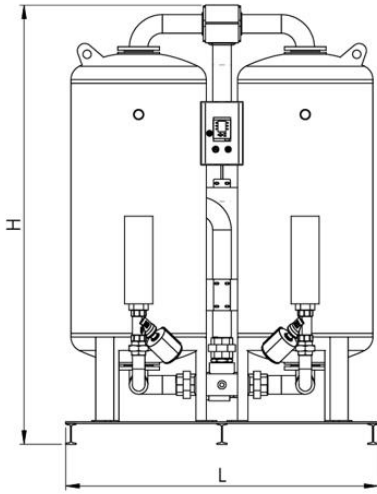

NDD-25

m ³ / minute	25,00
m ³ / hour	1500
Operating pressure [bar] (g)	10
Inlet - Outlet	DN65/BSP 2 1/2" Female - DN65/BSP 2 1/2" Female
Purge air loss	15%
Dimensions L x W x H [mm]	1100 × 900 × 2300
Shipping dimensions L x W x H [mm]	1150 × 950 × 2420
Maintenance area L x W x H [mm]	1600 × 1400 × 2800
Raw Material	Activated Alumina
Raw Material Weight [kg]	422
Net Weight [kg]	930
Gross Weight [kg]	970
Power	110-240V AC 50/60 Hz 50 W
Pre-filter - Post-filter [µm]	0,1 - 0,01
Operating temperature	5-45°C
Minimum inlet pressure	4,5 bar (g)
Maximum inlet pressure	10 bar (g)
Dew point	-40°C
Air quality ISO Specification	ISO 8573-1:2010 [Class 1 : Class 2] (Particles : Humidity)

		Compressed Air Inlet Temperature (Ti)										
Temp (°C)		25,00	30,00		35,00		40,00		45,00		50,00	
Ki		1,00	1,00		1,00		0,96		0,90		0,83	

Deviating working pressure P at the dryer inlet												
P bar(g)	5,00	6,00	7,00	8,00	9,00	10,00	11,00	12,00	13,00	14,00	15,00	16,00
Kp	0,75	0,88	1,00	1,06	1,12	1,17	1,22	1,27	1,32	1,37	1,41	1,46